





## SP- S 25 (STRAIGHT RUNNING)

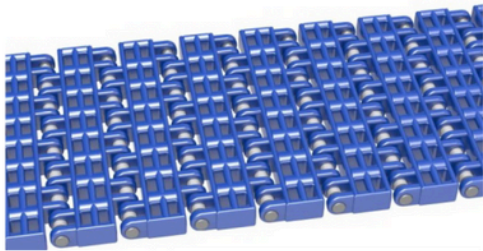

Flush grid

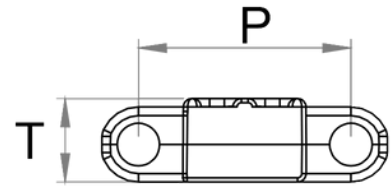

Description	mm	inch
Pitch (P)	25	0.98
T	9.8	0.38
Rod (Ø)	5	0.19
Surface type	25 % open	
Color	○ ●	
Material	PP / POM	
Curve	No	

## ACCESSORIES



Cleat height - 2"

## SP-S 25 (SPROCKET)

Teeth (Z)	Pcd (mm)	B	M/C	
			S	W
6	45	18	●	20
8	61	26	●	20
12	95	43	★	20
20	160	75.5	★	35

\* Type of bore : ★ - round & square, ■ - square, ● - round

\* A - minimal distance 28 mm (1.1")

\* For material availability contact our sales team

\* M/C - Machined solid, M/D - Moulded solid, S - Availability, W - Sprocket Width

